

INLET PIPE


SAFETING SCREEN


Name	Revision	Code réquisition	Notes
CHICHIGALPA	02		FITTING NOT LISTED TOLERANCES: UNLESS OTHERWISE SPECIFIED UNI EN 22768-1:96 ANY WELDING TIG SUPERFICIAL TREATMENTS
	Scale	Code document	
	1/..	339.22	
Titre-Description			
BASKET SCREEN 800 339.22			
Material			Date
Stainless steel 304			02/08/2022



EQUIPWATER
1 Rue des Epinettes
77200 Torcy, FRANCE
Phone: +33 1 76 34 01 44
Email: contact@equipwater.com
www.equipwater.com

EQUIPWATER reserves to terms of law the ownership of this drawing, that cannot be reproduced or make known to third or to competing firms without its authorisation



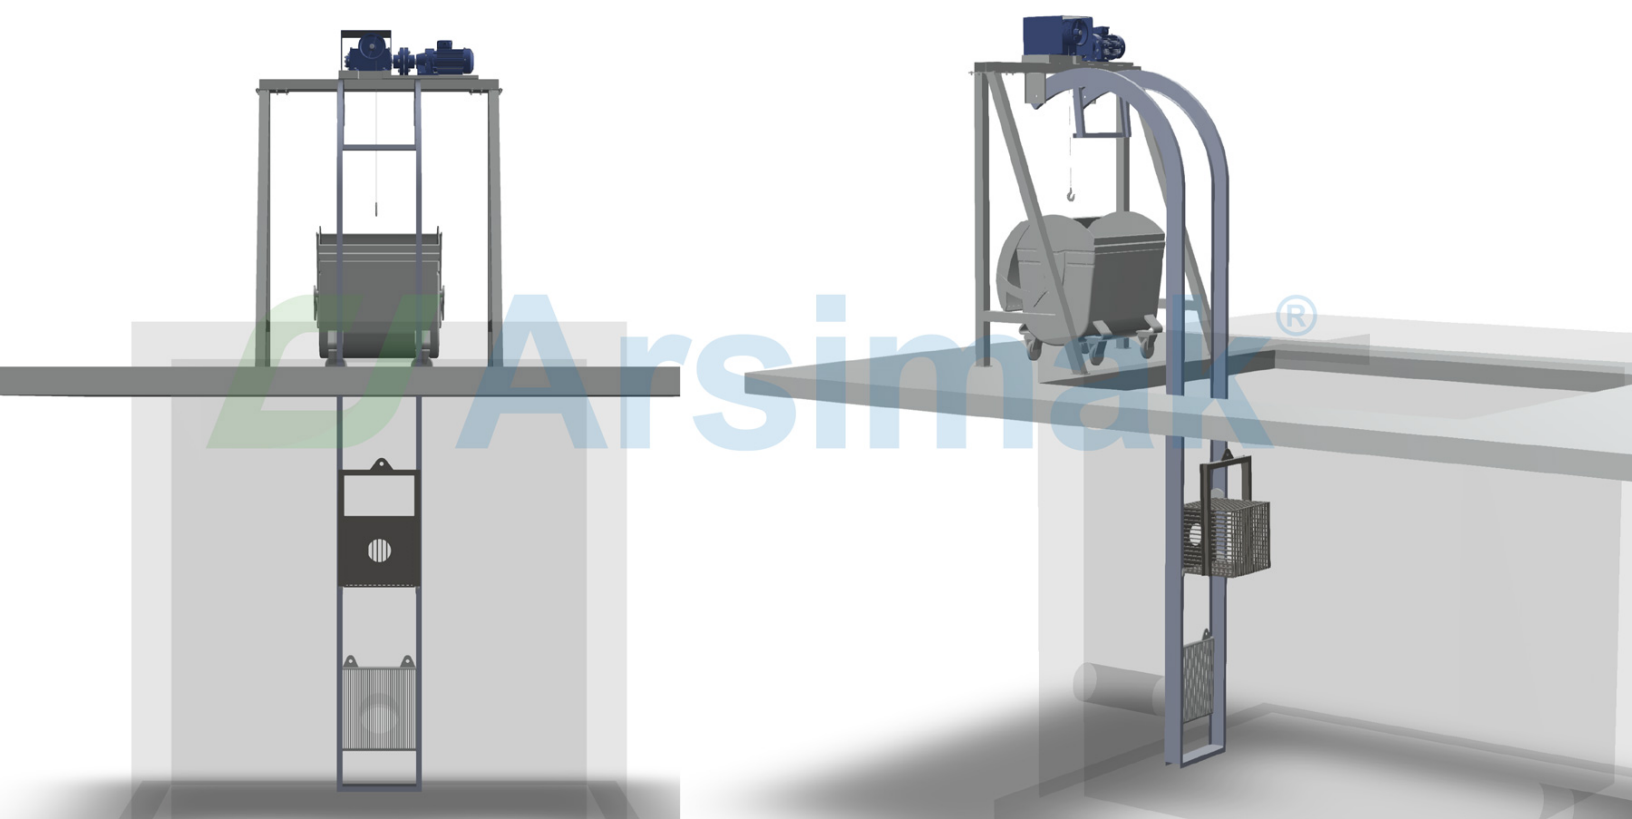

EQUIPWATER

16 Avenue de l'Europe

FRANCE

contact@equipwater.com

www.equipwater.com

N° TVA Intracommunautaire : FR31878872936

N° SIRET : 87887293600025

Code NAF : 4669B

RCS : 878 872 936 R.C.S. Soissons

WATER SUPPLY AND SEWERAGE AUTHORITY OF


ULAANBAATAR CITY, MONGOLIA

JAVKHLAN

Email : javkhlan.d@usug.ub.gov.mn

QUO2024906-00

Le jeudi 30 mai 2024

Image	Désignation	Quantité	PU Vente	Montant HT
	<p>Motorized BASKET SCREEN 800</p> <p>Equipment type: Basket screen with motorized lifting device</p> <p>Basket size: width 800 x depth 500 x h800mm approx.</p> <p>Screen spacing: 10 mm</p> <p>Lateral lifting guides: Included</p> <p>Dump height: approx. 1 700 mm</p> <p>Pipe depth: 4 000 mm</p> <p>Inlet pipe: DN 600</p> <p>Top endswitch to discharge the screen basket: Included</p> <p>Bottom endswitch to stop the screen basket: Included</p> <p>Safety screen: Included</p> <p>Dimensions of safety screen: 800x h800 mm approx.</p> <p>Safety screen spacing: 10 mm</p> <p>Lifting screen basket device: With cable</p> <p>Power installed: 2.2 kW / 400 V / 50 Hz / IP 55</p> <p>Cable speed: 10 mt-min</p> <p>Drive with electric cable hoist</p> <p>Safe working load 500Kg</p> <p>materials:</p> <p>Frame, guides & others: Stainless steel AISI 304</p> <p>Screen basket: Stainless steel AISI 304</p> <p>LOCAL CONTROL PANEL: included</p>	1,00	28 615,00 €	28 615,00 €
Total				28 615,00 €

Manufacturing time: Approx 18 weeks after approval of the drawings

Incoterm: Exworks (we can manage transport)

Payment terms: By transfer 30% at the order, 70% at shipment

General Sales Conditions GSC attached

Signature preceded by "GOOD FOR AGREEMENT"

Name and company:

Date:

Total HT	28 615,00 €
TVA (0 %)	0,00 €
Total TTC	28 615,00 €