

BS 2670 HT 3~ 251


Portable pumps ideal for applications in which the water or liquid contains concentrations of abrasives.



Technical specification



Curves according to: Water, pure ,4 °C,999.9 kg/m³,1.5692 mm²/s

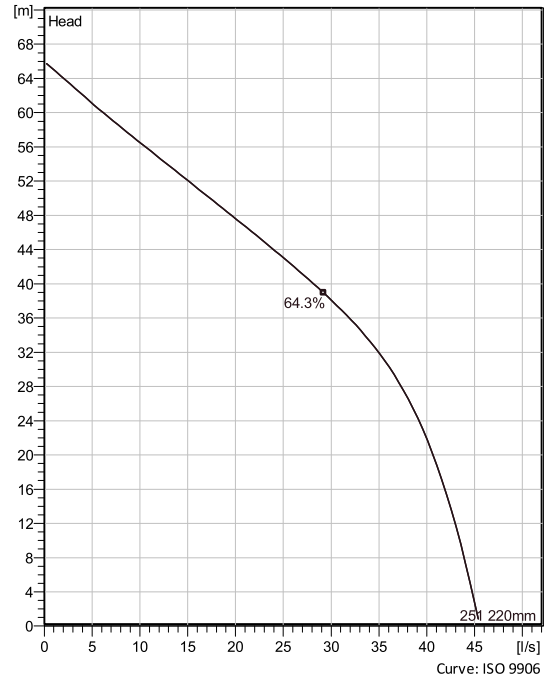

Configuration

Motor number B2670.181 21-18-2BB-W 18KW	Installation type S - Portable Semi permanent, Wet
Impeller diameter 220 mm	Discharge diameter 100 m

Pump information

Impeller diameter 220 mm
Discharge diameter 100 m
Inlet diameter 103 mm
Maximum operating speed 2905 rpm
Number of blades 3
Throughlet diameter 22 m
Max. fluid temperature 40 °C

Materials

Impeller Hard-Iron
Stator housing material Grey cast iron

Project
Block

Created by Joshua Harvey
Created on 2/11/2021 Last update 2/11/2021